

# Tailwater Recovery and On-Farm Storage Reservoir: *Nutrient Runoff Mitigation and Reuse Potential*



**Tailwater recovery (TWR) systems** are a combination of financially assisted USDA Natural Resource Conservation Service (NRCS) conservation practices aimed at collecting runoff and storing that water for irrigation. This surface-water storage structure is a viable option for

capturing and recycling precipitation and irrigation runoff (**Figure 1**). In addition to storing water for irrigation, these systems have the potential—and have been funded—to reduce nutrient runoff leaving the agricultural landscape.



Figure 1. Water movement through a TWR system. Note that not all TWR systems have the same components. Some TWR systems are comprised of only a large TWR ditch and no on-farm storage reservoir (OFS). Top left: Nutrient- and sediment-laden water running off a field in the Mississippi Delta region. Top right: Runoff water being captured by a TWR ditch. Bottom left: Nutrient- and sediment-laden water being pumped into an on-farm storage reservoir. Bottom right: Surface water being irrigated from a TWR/OFS system.

## Preventing Nutrients from Leaving the Farm

### Biological

Plant and microbial activity impact the water leaving agricultural fields. Biological activity occurs naturally in agricultural drainage ditches and also may occur in TWR systems. Plants and algae take up nutrients required for their growth (Figure 2). Microorganisms also play a central role in nutrient transformation and removal. When oxygen is not present, microorganisms in the soil can carry out a process called denitrification to reduce nitrogen in the water and return it to the air.

### Physical

Holding water on the landscape in a TWR system allows the heavier sediment and sediment-bound phosphorus to settle out of the water. This also allows time for biological processes to take place to reduce nitrogen. Finally, by recycling this water onto the landscape, TWR systems prevent sediment and nutrients from leaving the farm landscape (Table 1).

**Table 1. Annual mean loads leaving fields and running off into TWR systems and amount captured (prevented from leaving farms) by TWR systems in the Delta.**

	Sediment	Phosphorus	Nitrogen
Runoff (lb)	550,911	449	1,972
Captured (lb)	270,579	179	1,087

Source: Omer et al. (2018)



Figure 2. Plant and algal growth in TWR ditches in Mississippi's Delta region.

## Sediment and Nutrient Runoff

Sediment and nutrient runoff from agricultural fields occurs year-round with precipitation and irrigation events. However, there are times of the year when more sediment and nutrient loss occurs. **Figure 3** shows sediment, phosphorus, and nitrogen field runoff occurring from March to July each year. Most of the field runoff coincides with precipitation in the Mississippi Delta region. Runoff events occurring in March to July also overlap with the primary growing season in the region (**Figure 4**).

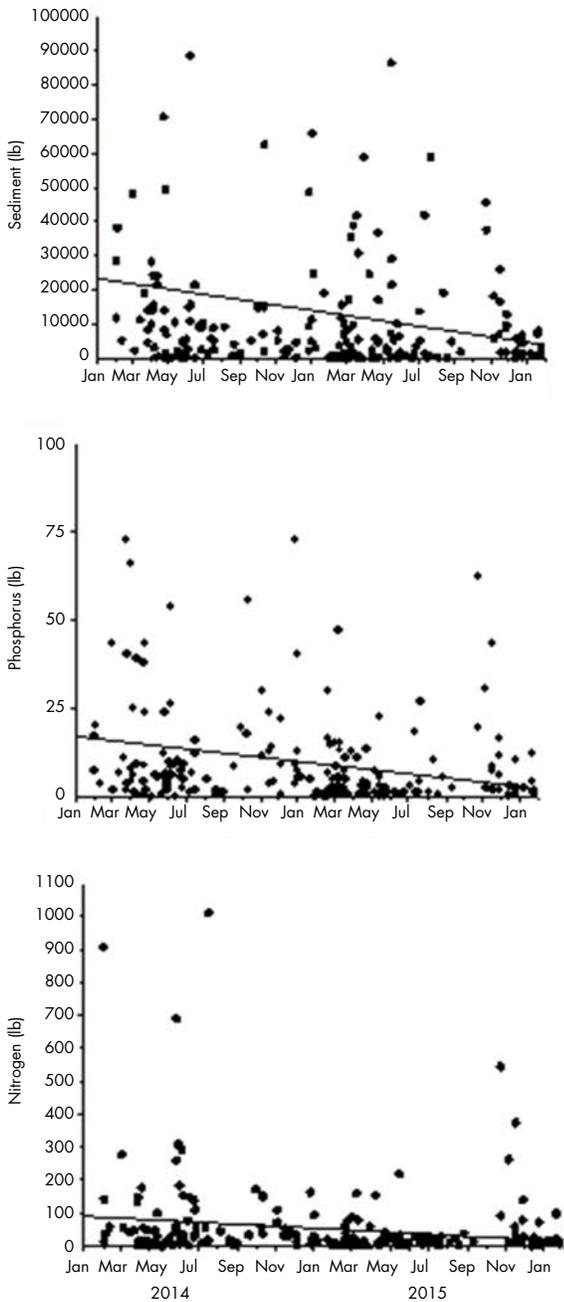


Figure 3. Sediment and nutrient loads leaving fields and running off into TWR systems annually (monitored for 2 years). Six TWR systems were monitored. The systems were within watersheds ranging from 141 to 385 acres and were all tilled land (except for turn rows). Solid lines represent the trend over the 2-year monitoring period.

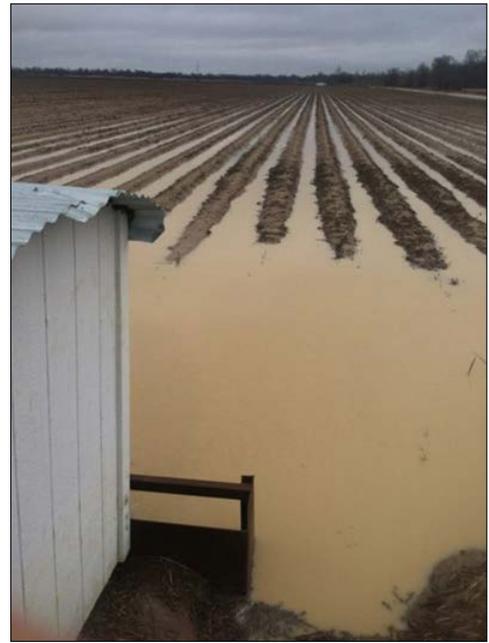


Figure 4. Runoff leaving a field after a precipitation event in the Mississippi Delta region. The small building on the bottom left houses water-quality sampling equipment used to monitor runoff leaving the field and entering the TWR system (not pictured).

## TWR System Sediment and Nutrient Capture Performance

Results show that TWR systems do not reduce concentrations of sediment and nutrients in captured runoff; however, loads of sediment and nutrients are reduced (Omer et al. 2018) (**Figure 5**). The impact TWR systems have on load reductions is substantial and is comparable to nutrient-loading goals of state and federal agencies. Captured nutrients are available in TWR system water for irrigation; however, the loads of nutrients are too little to reduce fertilizer application rates (Omer et al. 2017).

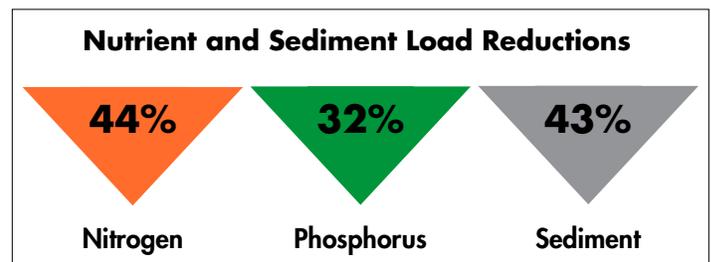


Figure 5. Mean percent load reductions from TWR systems in the Delta.

## Nutrients Available for Irrigation Reuse

Runoff captured by a TWR system is stored and reused as irrigation water, allowing potentially available nutrients to be put back into the field to meet crop needs (Figure 6). Results from this study showed relatively low nutrient values available per acre in TWR water stores (Table 2). The available amount of nutrients will fluctuate throughout the year with changes in temperature, precipitation, and fertilizer inputs in the field.



Figure 6. Rice irrigation with water from a TWR system in the Mississippi Delta region.

**Table 2. Mean loads of nutrients available (in the TWR system's water) to irrigate back onto crops during the irrigation season.**

	Phosphorus	Nitrogen	Inorganic Nitrogen
2014 (lb/ac)	0.9	9.0	1.4
2015 (lb/ac)	0.7	4.0	1.3
Mean (lb/ac)	0.8	6.5	1.3

Source: Omer et al. (2017)

## Summary

Tailwater recovery systems are a combination of conservation practices that can provide water-quality and water-conservation benefits, but they also require economic investments (see <http://extension.msstate.edu/publications/tailwater-recovery-twr-and-farm-storage-ofs-reservoir-economic-considerations>). The cost of TWR implementation is higher than other conservation practices to achieve similar nutrient-reduction benefits. Other conservation practices to help achieve water-quality goals include controlled drainage and cover crops. Consult your county USDA-NRCS agent for more details on conservation practices.

## References

- Omer, A. R., Miranda, L., Moore, M. T., Krutz, J., Prince Czarnecki, J. M., Kröger, R.,...Allen, P. J. (2018). Reduction of suspended solids and nutrient loss from agricultural lands by tailwater recovery systems. *Journal of Soil and Water Conservation*, 73(3), 284–297. <http://doi:10.2489/jswc.73.3.284>
- Omer, A. R., Moore, M. T., Krutz, J., Kröger, R., Prince Czarnecki, J. M., Baker, B., & Allen, P. J. (2017). Potential for recycling of suspended solids and nutrients by irrigation of tailwater from tailwater recovery systems. *Water Science and Technology: Water Supply*, 18(2). <http://doi:10.2166/ws.2017.207>

Publication 3263 (POD-08-18)

By Austin Omer, PhD, Extension Associate, and Beth Baker, PhD, Assistant Extension Professor, Wildlife, Fisheries, and Aquaculture.



Copyright 2018 by Mississippi State University. All rights reserved. This publication may be copied and distributed without alteration for nonprofit educational purposes provided that credit is given to the Mississippi State University Extension Service.

Produced by Agricultural Communications.

Mississippi State University is an equal opportunity institution. Discrimination in university employment, programs, or activities based on race, color, ethnicity, sex, pregnancy, religion, national origin, disability, age, sexual orientation, genetic information, status as a U.S. veteran, or any other status protected by applicable law is prohibited. Questions about equal opportunity programs or compliance should be directed to the Office of Compliance and Integrity, 56 Morgan Avenue, P.O. 6044, Mississippi State, MS 39762, (662) 325-5839.

Extension Service of Mississippi State University, cooperating with U.S. Department of Agriculture. Published in furtherance of Acts of Congress, May 8 and June 30, 1914. GARY B. JACKSON, Director