

Transplanting Trees & Shrubs



Buying trees and shrubs for landscaping can be expensive. For a newly built home, the estimated cost for a landscape design is 5 to 15 percent of the cost of the home. This type of investment needs to be well planned and designed for years of pleasure. In many situations, though, people do not follow instructions for planting individual plants in the landscape.

Establishing landscape trees and shrubs successfully depends on techniques and care—proper soil preparation, planting methods, and follow-up care. Plants require oxygen, nutrients, and water for proper growth. Improper planting and inadequate follow-up care are the main causes of plant death in the landscape. This is a chance to get new plants off to a good start, so a closer look at planting techniques may help you be more successful in establishing your home landscape.


Preparing planting sites for shrubs in a landscape design involves two methods. When installing several plants, prepare a planting bed by tilling or double-digging the site 15 to 20 inches deep, working in organic matter as you prepare the planting site. Add fertilizer amendments by mixing thoroughly into the soil. This soil preparation is ideal when planting several plants in an area.


The other method of site preparation involves digging a hole for each plant. The hole method of planting is used for replacing or adding plant material. Site preparation involves more than just digging a hole for each plant.

Most nurseries grow ball and burlap and bare-root plants in sandy to loamy soil. When you move these plants to the landscape site, the difference in soil texture can make transplanting more difficult. Getting new plants established in tough, clay soil is a challenge. Clay soils are rich in nutrients but are difficult to manage. A loam soil has fairly balanced amounts of clay, silt, and sand, making it ideal for transplanting shrubs and trees.

Preparing the Planting Site

Dig the planting hole at least twice as wide as the diameter of the plant being transplanted. Dig the edges of the hole at a 45-degree angle. If you dig the planting hole with a mechanical tree spade, cut grooves in the sides and bottom of the hole to encourage roots to grow into the surrounding soil.

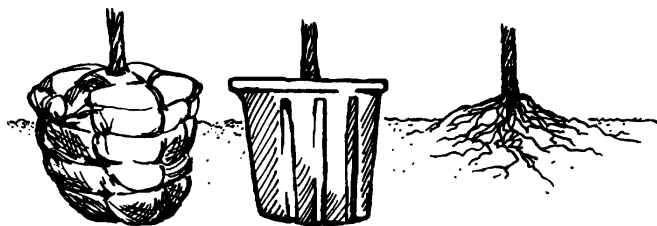

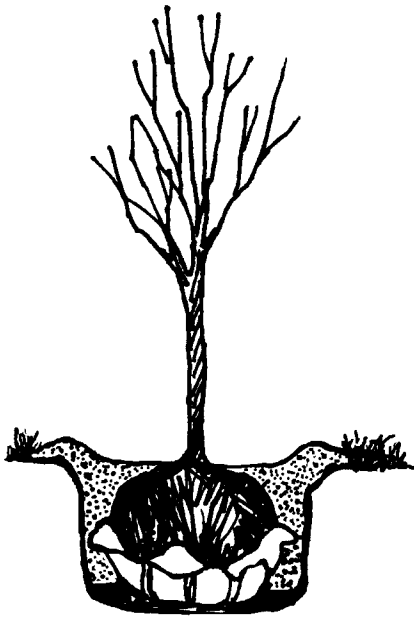

Ball and burlap planting with a berm to hold up water.

Ball and Burlap Plants

For ball and burlap plants, dig the planting hole no deeper than the height of the soil ball. Digging the hole deeper lets a plant settle and can suffocate the roots. Planting depth needs to be the same as in the field where the plant was grown. Leave a pedestal of undisturbed, firm soil where the plant will be placed to avoid the root ball sinking as the soil settles. The discoloration on the bark near ground level indicates the soil level. Lift the plant by the root ball, not the trunk. When filling the hole, be careful not to disturb the root ball. Add backfill up to two-thirds of the depth of the root ball, firm the soil, then settle it with water. Remove the burlap from the top of the soil ball by rolling it down the side of the soil ball. Burlap left on top of the soil line will have a "wick effect," drying the root ball. Cut all strings or metal wire. If the burlap is a synthetic material or is treated, remove it from the soil ball after the plant is in place. If the root ball is firm enough to remain intact when you handle it, remove the regular burlap, too.

Make a 3- to 4-inch berm or raised area surrounding the root ball. (A berm is a ring of soil around the base of the plant outside the planting hole. This helps hold water


and protects the shrub or tree from possible damage by a lawn mower.) Be sure the berm is well beyond the edge of the root ball so water will be directed to the right place. If drainage is poor, remove the berm after the plant is established because you do not want to direct excess water to the hole.

Container-Grown Plants

You handle container-grown plants the same way as ball and burlap plants. Make the planting hole at least twice the diameter of the soil ball but no deeper than its height. Spread the roots by gently teasing to break the circular root pattern. If the plant is pot bound, make three vertical cuts through the root system. Also, cut the bottom of the root ball to remove matted roots.

Bare-Root Plants

Some bare-root plants are packed with materials to keep roots moist in the bag. After removing the packing bag, carefully remove any packing material from the roots. Inspect the roots for any diseased, broken, or dead roots, and clip any of these roots with pruning shears before planting. Clip exceptionally long roots. Immerse the roots in a bucket of water to soak for at least 1 hour.

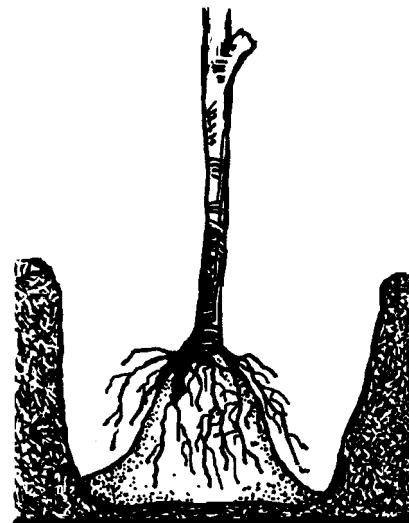

Planting bare-root on a crown of soil.

Make individual planting holes for bare-root plants wide enough to spread the roots but no deeper than the original soil depth. To prevent settling, build a crown for fibrous-rooted plants, such as roses. Leave the center of the bottom portion of the planting hole higher than the edges to let the plant rest firmly. This mound at the bottom of the hole keeps the plant from settling and helps spread the roots in their natural position.

Watering

Thoroughly water newly transplanted trees and shrubs. Water is crucial during the first growing season, since lack of water is the leading cause of transplant failure. If you water your plants properly, you have a greater chance for success with your landscape plants.

Mulching



Mulching is essential for young shrubs and trees. It helps save and extend available water, reduces competition by keeping down weeds, moderates temperature extremes, and acts as a barrier or visible marker for landscape maintenance equipment.

Too much mulch can be harmful. Mulching with only 2 inches of bark or 6 inches of pine straw is enough to control weeds and hold moisture in transplanted plants.

Staking and Guying

It is sometimes necessary to stake and guy a tree that will not stand up by itself or that is in a windy or heavy-traffic area. Young trees have a small trunk diameter in relation to tree height; guywires support slender trees and protect them from wind damage.

When staking trees, remember that the main tree stem grows stronger more quickly if the top of the tree is free to move with the wind. Set staking posts in line with the tree trunk, far enough away so the trunk cannot rub against the post and damage its bark. Use a broad bandage or run the wire through a piece of rubber hose to strap it to the tree.

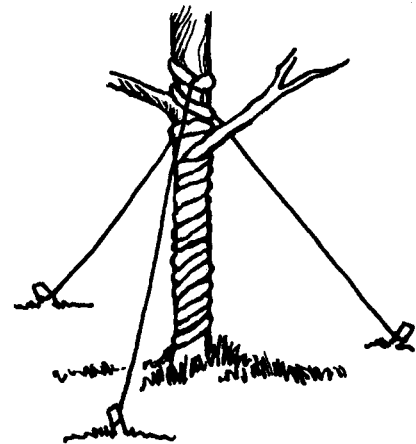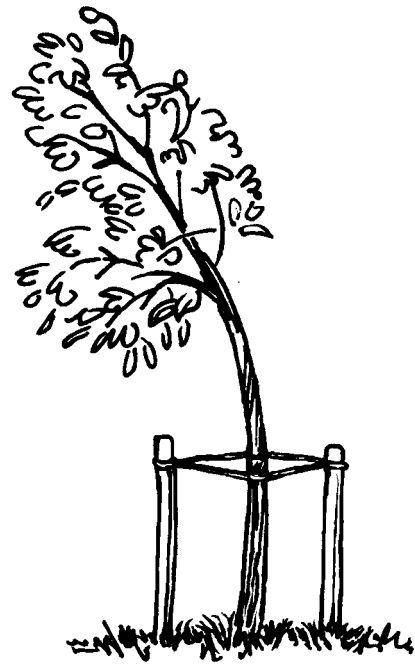

Tie the tree at a point just high enough to hold it upright in calm weather. After windy conditions, the tree should return to its vertical position.

Amending Planting Site

If you are adding amendments to the soil, choose them carefully. Remember—young plants eventually send roots beyond the planting hole. Peat moss or other soil-structure improvers often are added to the growing medium. The result is that the newly planted tree grows an intensive

root system that soon becomes mated with the good soil but will not easily penetrate beyond it into the heavier soil.

The recommendation for amending clay soils is to add organic matter such as pine bark or leaf mold. Add the bark at the rate of 2 to 3 inches per 6-inch depth of claylike soil to be amended. Add 1 inch of peat moss to a 6-inch depth of sandy soil to be amended. An ideal soil consists of 15 percent air, 50 percent solids, and 35 to 40 percent water.

Easy Test to Determine Soil Drainage

To help determine soil drainage, choose a day when the soil is not excessively wet from rain or other factors. Use a large coffee can (approximately 46 ounces) with the top and bottom removed. Dig a 4-inch-deep hole and set the can on the floor of the hole. Firm the soil around the can so water cannot slip under the bottom edge.

Fill the can to the top with water; wait an hour, and then measure the water level. If the water level drops at least 2 inches in 1 hour, the drainage is considered normal. If the level drops more than 5 inches in 1 hour, it is considered too much. If the level doesn't seem to drop at all, the soil drainage is poor.

Dig a hole 1 foot wide and fill with water. If all the water has not drained out within 6 hours, the soil has poor subsurface drainage.

Planting in Poorly Drained Soils

You have some alternatives if your planting site does not allow for surface drainage to remove excess water:

- Install a French drain, which removes water through a network of drains. You must have a point lower than the landscape site for the water to drain. Plant in a raised bed, which needs to be at least 12 inches deep.
- Prepare a large berm (from 1 to several feet deep). Such structures can complement your landscape.
- If you are planting directly on heavy soil, incorporate a 3-inch layer of new soil to form a transition layer. A sudden change in soil texture disrupts the flow of water through the soil profile, possibly causing a stagnant area beneath the new soil profile.

Information Sheet 965 (POD-10-17)

Distributed by **Geoff Denny**, PhD, Assistant Extension Professor, Plant and Soil Sciences.



Copyright 2017 by Mississippi State University. All rights reserved. This publication may be copied and distributed without alteration for nonprofit educational purposes provided that credit is given to the Mississippi State University Extension Service.

Produced by Agricultural Communications.

We are an equal opportunity employer, and all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, national origin, disability status, protected veteran status, or any other characteristic protected by law.

Extension Service of Mississippi State University, cooperating with U.S. Department of Agriculture. Published in furtherance of Acts of Congress, May 8 and June 30, 1914. GARY B. JACKSON, Director